

# DTT-18/23 DYNAMIC TUMBLE DRYERS



## TOUCH II

User friendly and totally programmable 7" Touch II  
 USB Connection. PC software free of charge for programming, traceability, data analysis...  
 Videos on display (ads, instructions, etc.)  
 37 languages



## OUTSTANDING FEATURES

Reversing drum action as standard  
 Stainless steel drum as standard  
 Frequency inverter as standard



## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
 Big fluff filter



## VERSATILITY

Make to order - customisation  
 WET CLEANING  
 OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## CONNECTIVITY

IoT Domus Connect  
 Management of laundries: OPL and COIN  
 Remote payment (coin laundry)



## ERGONOMICS

Drawer as fluff filter, made of stainless steel  
 Biggest door diameters  
 Opening sense of door adjustable on site



## MAINTENANCE

Hinged panel: easy and ergonomic access  
 Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



## OTHERS

Grey skinplate outer casing, stainless steel look  
 SOFT DRY - new drum with stamped holes  
 COOL DOWN - anti-wrinkle at the end of the cycle  
 Heating options: electric, gas and steam  
 CE approved




## OPTIONS

- EFFICIENT DRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- DomusConnect-IoT communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models:  
 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT-18 DYNAMIC		DTT-23 DYNAMIC	
<b>CAPACITY</b>					
Capacity 1/18	Kg	18		26	
Capacity 1/20	Kg	17		23	
Hourly Output DYNAMIC*	Kg/h	35-33		41-35	
Evaporation capacity DYNAMIC*	l/h	16,3		20,4	
<b>DRUM</b>					
Ø Drum	mm	750		855	
Ø Door (load hole)	mm	574		574	
Door center height	mm	976		1.030	
Load hole bottom height	mm	689		743	
Drum length	mm	746		800	
Drum volume	l	330		460	
<b>POWER</b>					
Drum motor power	Kw	0,37		0,37	
Fan motor power DYNAMIC	Kw	0,25		0,55	
Electric heating power ALL RANGES	Kw	18		24	
Total electric power (elec.model) DYN	Kw	18,67		24,97	
Gas heating power ALL RANGES	Kw	20,51		31	
Total electric power (gas model) DYN	Kw	0,67		0,97	
Steam heating power ALL RANGES	Kw	30		49,2	
Steam heating power (gas model) DYN	Kw	0,67		0,97	
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / GAS</b>	<b>ELECTRICAL</b>	<b>STEAM / GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		1"	
Ø Condensed (Steam models)	BSP	3/4"		1"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	785 / 865		890/970	
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255/1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.812/1.940	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	187 / 200		210/230	
<b>OTHERS</b>					
Max airflow DYNAMIC	m3/h	850		1.200	
Ø Fume exhaust	mm	200		200	
Sound level DYNAMIC	dB	64		65	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

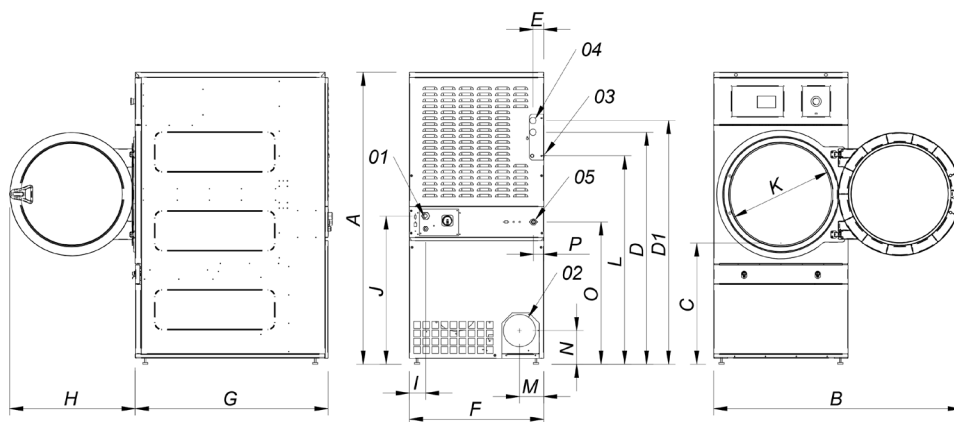

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (DTT-23)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (DTT-23)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DTT-18	1694	1447	689	1354	1422	68	68	785	1125	735	95	870	575	1226	133	180	830	65
DTT-23	1812	1552	743	1430	1532	112	55	890	1255	735	95	920	575	1344	238	180	885	65