

**ecomax**<sup>TM</sup>  
by **HOBART**

**HOOD-TYPE  
DISHWASHER  
H615**



**made in germany**

# ECOMAX H615 HOOD-TYPE DISHWASHER



The dishwasher for ergonomic and efficient work processes in the kitchen. Combined with tables, it is a powerful partner for the catering and hotel sector.

## plusFEATURES **+++ additional to ecomax +++**

- + Stronger wash pump for best wash results
- + Shorter cycle times for higher capacities
- + All around ergonomic handle

### Hood-type Dishwasher ecomax H615

Cycle times*	60/90/180 sec
Capacity per hour*	up to 60 racks
Wash/rinse temperature	approx 60° / >82°C
Tank capacity	21 l
Fresh water consumption/rack	2.2 l
Wash pump	0.7 kW
Wash tank heating	2.6 kW
Heating booster	6.2 kW
Total loading	7.1 kW
Rated voltage	415V/50hz/3N
Width/Depth/Height	635/815/1470 (1915 open) mm
Loading height	440 mm
Rack size	500 x 500 mm

\*hot water connection\*

## PRODUCT ADVANTAGES

- Top mounted SINGLE BUTTON CONTROL - Easy-to-see, Easy-to-use with status indication & 3 cycles - 60, 90 & 180 seconds. Includes HOBART's machine HYGIENE CYCLE to guarantee optimum machine hygiene
- The 4-sided closed hood keeps energy and humidity in the system and saves up to 3 kW energy
- Deep-drawn wash tank for easy cleaning
- Stainless steel rinse arm and housing
- Rotating wash & rinse arms for an even water distribution
- Indented wash nozzles prevent blocking
- 2Low 2.2 litres per cycle rinse volume
- dish / glasswasher with Rinse Pump to guarantee rinse volume, pressure & sanitation results
- Thermostop function for guaranteed temperatures
- Self-cleaning during drain out to reduce labour input
- Removal of rinse arms without any tools
- Easy access to all parts
- Loading of extra high trays & pots: 440 mm loading height

## STANDARD EQUIPMENT


- Watermark Approved
- Plate rack P-18-12
- Cutlery basket CB1
- Rinse aid and detergent dispenser
- Heater with thermostat control
- Electric cable, flexible water supply & drain hose

Connection to cold water or reduced voltage can extend the heating time and the program runtime. We recommend an external water softener for pressure pump: 0.8-6 bar.

\* Thermostop guarantees required temperatures with cold water, the actual cycle times extend accordingly.

For corner operation we recommend to make the right side of the machine accessible for service.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or a HOBART HYDROLINE water treatment system.

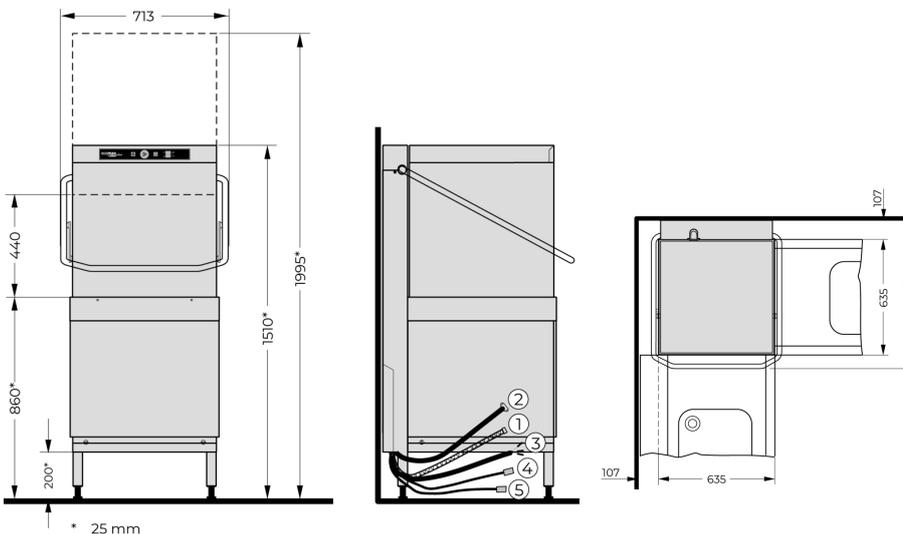

### CONNECTIONS

① Drain hose	2,000 mm   ID 20 / OD 25
② Supply hose	2,000 mm   R 3/4"
Required flow rate	5 l/min
Flow pressure	0.8-6 bar (80-600kPa)
Max. supply water temperature	60 °C
③ Power cord	2,500 mm
Supply hose for	
④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm